VELOCITY™

INNOVATIVE AND TRUSTED PRIMING SOLUTIONS

SIMPLIFYING THE BONDING PROCESS

SRP® VELOCITY247
ALL IN ONE BLACKOUT PRIMER

- One step, blackout primer
- Useable on glass, pinchweld, bare metal, painted surfaces, cut back urethane
- 4-6 minute Flash Time

SRP VELOCITY™

SRP VELOCITY ADHESIVES OEM APPROVED

SRP® VELOCITY™ PRIMER PROPERTIES

	VELOCITY247
USE	ALL-IN-ONE BLACKOUT PRIMER
CAP COLOR	BLACK
USE WITH	ALL SRP ADHESIVES
FLASH TIME	4 TO 6 MINUTES*
ACTIVE TIME	8 HOURS
BOTTLE SIZE	100ML
OPEN SHELF LIFE	14 DAYS
IDEAL STORAGE TEMPERATURES**	60°F - 80°F (16°C - 27°C)
WORKING AMBIENT TEMPERATURES	40°F - 120°F (4°C - 60°C)

*Dependent on temperature. **Please see SRP Velocity Installation Manual for details.

CR-007-A

- Formulated for environmental contaminants.
- Targets fingerprints, pollen, dirt, bird droppings, tree sap, and more.
- Used with CR-007-B, prepares surface for primer application.

CR-007-B

- Formulated for industrial contaminants.
- Effectively removes grease, oil, light urethane, and more.
- Used with CR-007-A, provides a residue-free surface.

CR-007-X

- Heavy-duty paste for extreme grime removal.
- Finish with CR-007-A and CR-007-B for complete contamination elimination.

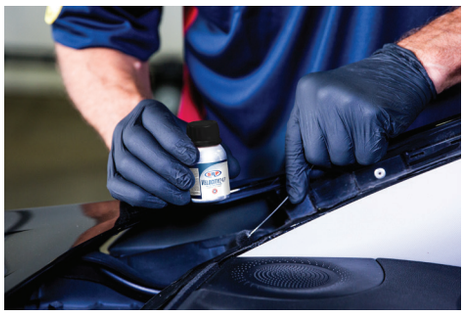

SEE THE SRP VELOCITY INSTALLATION MANUAL FOR COMPLETE PRODUCT USAGE INSTRUCTIONS

SRP®
650 Pelham Blvd., Suite 100 • St. Paul, MN 55114
(800) 728-1817 • www.srpproducts.com
The SRP logo is a registered trademark of Mondofix, Inc., used under license.
VELOCITY is a trademark of Mondofix, Inc., used under license. ©2025 MONDOFIX, INC.